


确认此型号所有图纸请签名: _____

版本

修改内容

日期

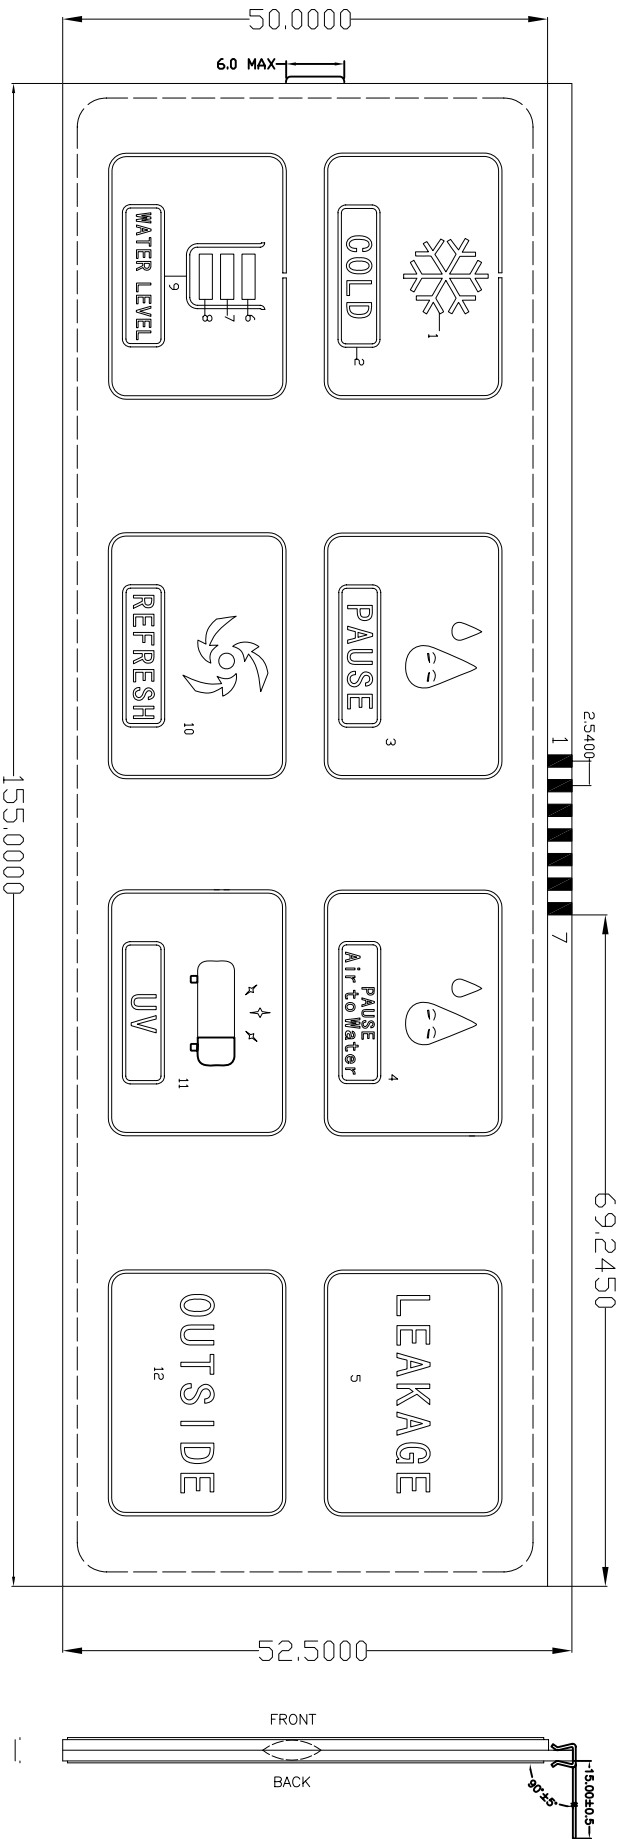

| | | | | | | | |
|------|------|------|------|------|---|----|----|
| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| COM4 | | | | COM4 | 1 | 3 | 4 |
| COM3 | | | COM3 | | 2 | 10 | 5 |
| COM2 | | COM2 | | | 8 | 6 | 12 |
| COM1 | COM1 | | | | 9 | 7 | 11 |

SPECIFICATIONS

FRONT POLARIZER : TRANSMISSIVE
 BACK POLARIZER : TRANSMISSIVE
 STORAGE TEMP : -10°C TO +60°C
 OPERATING TEMP : -0°C TO +50°C
 VIEWING DIRECTION : 12 O'CLOCK
 DRIVE CONDITION : 1/4 DUTY, 1/2 BIAS, 5.0 V
 DISPLAY MODE : TN, POSITIVE MODE
 CONNECTOR : PIN
 CUSTOMER P/N :

SHEET: 1 SHEET

GENERAL TOL. TOL MM UNITS MM

APPROVALS DATE

DWN

CHK


APP

WINKEE ELECTRONICS CO.,LTD.
盈凯电子科技有限公司

MODEL NUMBER :

草图

TEL: 27698963
 FAX: 27946093
 DATE:



DO NOT SCALE THIS DRAWING. PROJECTION